


SSR

SOLAR ROLLER SHUTTER

FEATURES

- The most effective solution against solar heat
- Excludes light completely
- Protects against burglary
- Gives you 100% privacy
- Ready-to-use solution, no additional work is needed
- io-homecontrol® compatible
- Can be installed at any time after the installation of the window
- Not compatible with high pivot Rooflite windows
- Not compatible with old product platform (DP, DV, AA,AV,MOEV windows)
- 3 year guarantee

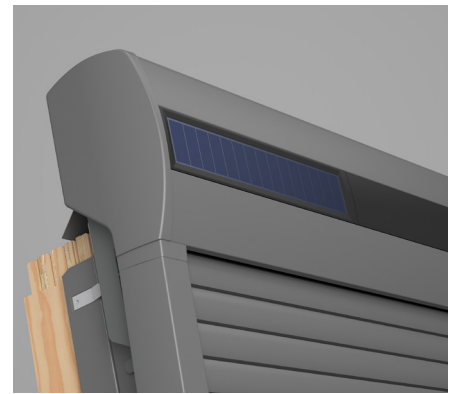

APPLICABLE

- In public and domestic buildings
- In roof pitch range of 15-90°
- Designed to perfectly fit to Rooflite+ windows regardless the roofing material

MATERIAL

- Coated aluminium
- Double insulated aluminum slats for increased insulation

OPERATION

- Electrical operation 24V 4-step tubular motor
- included wall switch
- More shutter can be controlled with one wall switch

SSR COMPATIBILITY TABLE

WINDOW SIZE (cm)	WINDOW SIZE CODE	ROLLER SHUTTER
55x78	C2A	SSR C2A
55x98	C4A	SSR C4A
66x118	F6A	SSR F6A
78x98	M4A	SSR M4A
78x118	M6A	SSR M6A
78x140	M8A	SSR M8A
114x118	S6A	SSR S6A